



Conveyor

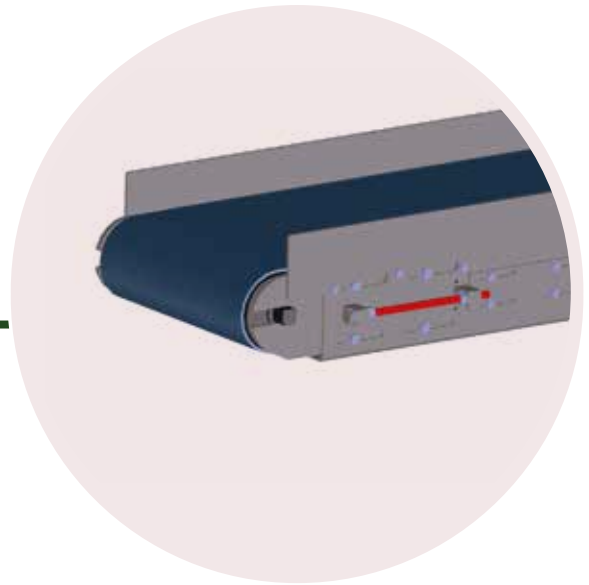

CONVEYOR

- Fixed chassis in RVS304 - pearl blasted.
- Conveyor Type UB 46 BLAA, endless welded, suitable for plate support, food grade.
- Connected with supports to Cerex or Pellex C+ frames.
- Drum engine Ø 100mm – Force Beltpull 550N.

- Turning Drum Ø 100mm.
- Equipped with side guide plates, bolted on side of chassis, frame height conveyor 120mm.
- Plate support for conveyor belt.
- Return rollers Ø 50mm.

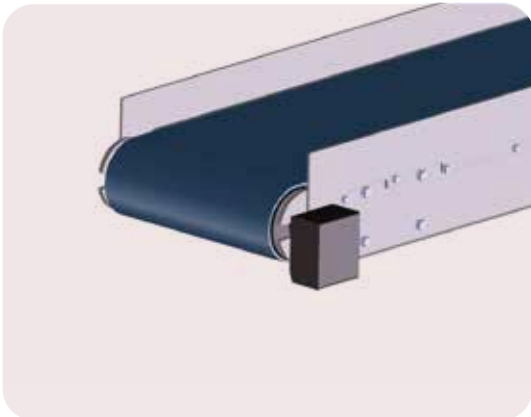

Technical Data

DIMENSIONS	LENGTH	5000 mm (extendable with segments of 2500mm)
	WIDTH	341mm (conveyor 300mm)
	HEIGHT	174mm
CONVEYOR SPEED	Max. 21,6 m/min 14,4m/min @ 50Hz	
VOLTAGE	3 x 230V or 3 x 400V 50 – 60 Hz	